

R&E **ROBOTICS &** END OF LINE

Model 301 Vertical L bar sealer



SEMI-AUTOMATIC VERTICAL **BAGGING MACHINE BENEFITS CUSTOMERS**

SUBSTANTIAL FILM SAVINGS ON CYLINDRICAL PRODUCTS AND PRODUCTS THAT ARE LONGER THAN THEY ARE WIDE

The Model 301 packager is a versatile packager suited for products that can fit into a 18" x 24" package. This hand load system is easy to operate by simply loading products through the light curtain into the web of film. Once the operator exits the light curtain the package is automatically produced. The Model 301 is easily integrated with multiple infeed systems to offer a more automated process.

This unit is also offered in a pouch pack configuration for kit packaging projects.

APPLICATIONS

- Hardware Kits
- Water Bottles
- Tissue Paper
- Air Fresheners
- Puzzle Pieces
- · Paint Rollers
- Medical Products
- Drink Mugs
- Pipettes
- · And many more

Lids

Cups

Produce



Shown with optional cleated conveyor infeed and powered film unwind



Electrical enclosure and HMI location





RENNCO MODEL 301 VERTICAL L BAR SEALER

TYPICAL PRODUCT SPECIFICATIONS

Machine Dimensions	63 1/8" W x 69" L x 73" H (89" top of light curtain)
Standard Vertical Seal	14" (18" Optional)
Standard Horizontal Seal	24"
Packaging Material Used	Centerfolded Polyethylene or Polyolefin

Standard Jaw Opening	Adjustable to 9 ¾"
Electrical Requirements	240 V, 60 Hz, 3 Ph, 15 amps
Air Requirements	.16 CFM per machine cycle at 80 PSI CFM will very depending on added options
Speeds	Pneumatic system up to 35 per minute* Servo system up to 55 per minute*

^{*}depending on application



POUCH PACK SEAL ASSEMBLY


Horizontal Seal Below Vertical Seal (For Multiple Loose Items)



OPTIONS

- · Film Registration Eye For Printed Film
- · Static Eliminator
- · Hole Punch For Air Release
- · Jaw Guards
- · Pin Perforator For Air Release (Shrink Application)
- · Header Sealer

- · Powered Film Cradle For 16" Diameter Rolls Of Material
- Film Cart For 22" Diameter Rolls Of Material
- · Hole Punch For Hanging Hole
- · Discharge Conveyor
- · Servo Driven Jaw Drive

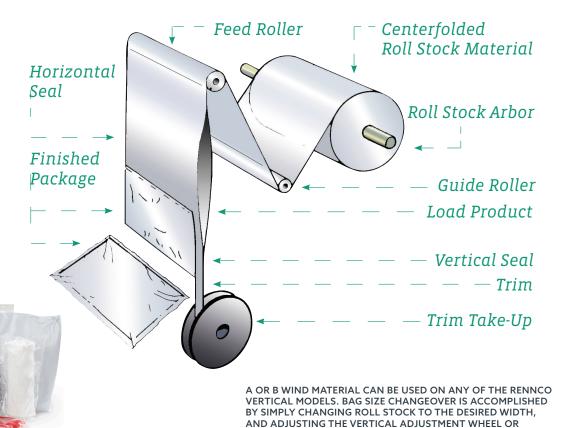

©2022 ProMach Inc. ProMach reserves the right to change or discontinue specifications and designs shown in this brochure without notice or recourse PM-REN-301-0622 Folder

TOLL FREE 800-409-5225 INTERNATIONAL 517-568-4121

517-568-4798

WEB

300 Elm St Homer, MI 49245

CONTROL FOR DIFFERENT LENGTHS.